

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number
WO 2004/003596 A2

(51) International Patent Classification⁷: **G02B**
(21) International Application Number:
PCT/IL2003/000541
(22) International Filing Date: 26 June 2003 (26.06.2003)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
60/392,489 28 June 2002 (28.06.2002) US
(71) Applicant (for all designated States except US): **TECH-
NION RESEARCH AND DEVELOPMENT FOUN-
DATION LTD.** [IL/IL]; The Senate Bld., Technion City,
32100 Haifa (IL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(72) Inventor; and
(75) Inventor/Applicant (for US only): **HASMAN, Erez**
[IL/IL]; 6 Haashed st., 38493 Hadera (IL).
(74) Agent: **MILLER - SIERADZKI ADVOCATES AND
PATENT ATTORNEYS**; 18 Mahanaim st., P.O.B. 6145,
31061 HAIFA (IL).

Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: **GEOMETRICAL PHASE OPTICAL ELEMENTS WITH SPACE-VARIANT SUBWAVELENGTH GRATINGS**

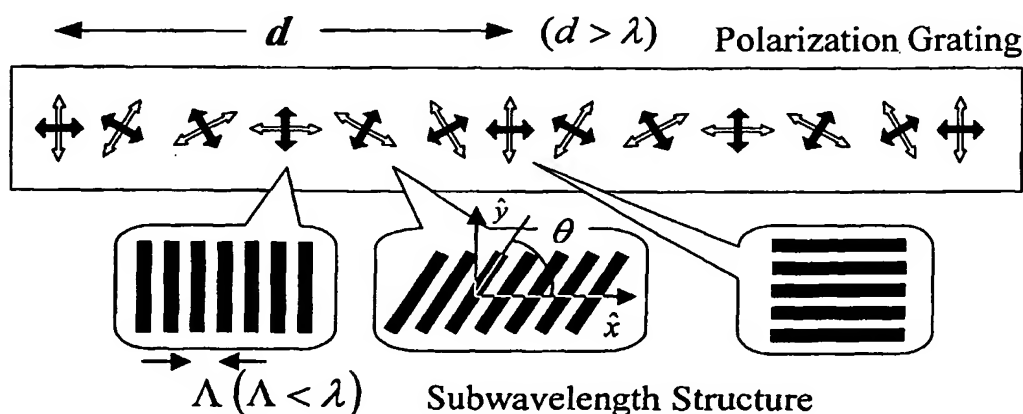

(57) **Abstract:** A space variant polarization optical element for spatially manipulating polarization-dependent geometrical phases of an incident light beam. The element comprises a substrate with a plurality of zones of gratings with a continuously varying orientation. The orientation denoted by $\theta(x-y)$ is equal to half of a desired geometrical phase (DGP) modulus 2π . Each grating has a local period that is smaller than the wavelength of the incident light beam. In other embodiments of the present invention the substrate comprises a plurality of zones of gratings with a continuously varying orientation.